


230 VAC, 50 Hz, 16A x 1 230 VAC, 50 Hz, 16A x 2 230 VAC, 50 Hz, 32 A 400 VAC, 50 Hz, 16 A x 3 (3 phase)

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A 240 VAC, 60Hz, 50 A

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. CONTACT YOUR DEALER FOR DETAILS.

A6L/R6L/X6L

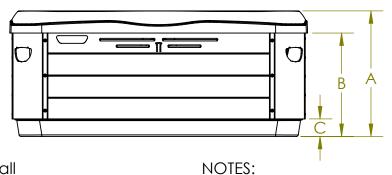

Height:

- A Överall
- 34" [86.4cm] B Ground to Bottom of Lip 28" [71.1cm] C- Ground to Bottom of Cabinet
- 4 3/4" [12cm]

DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 61.3" [155.6]

***INTERNAL ELECTRICAL STUB-UP**