
bullfrog

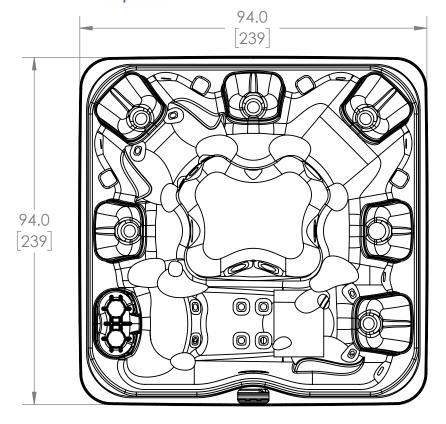

89.6 228 FROM BOTTOM 28.7 OF BASE 73 89.6 228 FROM BOTTOM OF BASE 35.0 35.0 89 89 5.0 * Ø 3.0* EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE: [13] 230 VAC, 50 Hz, 16A x 1 230 VAC, 50 Hz, 16A x 2

NOTES: Height:

A - Överall 38" [96.5cm]
B - Ground to Bottom of Lip
32" [81.3cm]
C- Ground to Bottom of Cabinet DOOR ENTRY IS CENTERED ON THE FRONT OF THE SPA WITH THE FOLLOWING SPAN: 75.25" [191]

43/4" [12cm]

*INTERNAL ELECTRICAL STUB-UP

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

240 VAC, 60Hz, 30 A 240 VAC, 60Hz, 50 A

230 VAC, 50 Hz, 32 A

400 VAC, 50 Hz, 16 A x 3 (3 phase)

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

A8L/R8L/X8L