
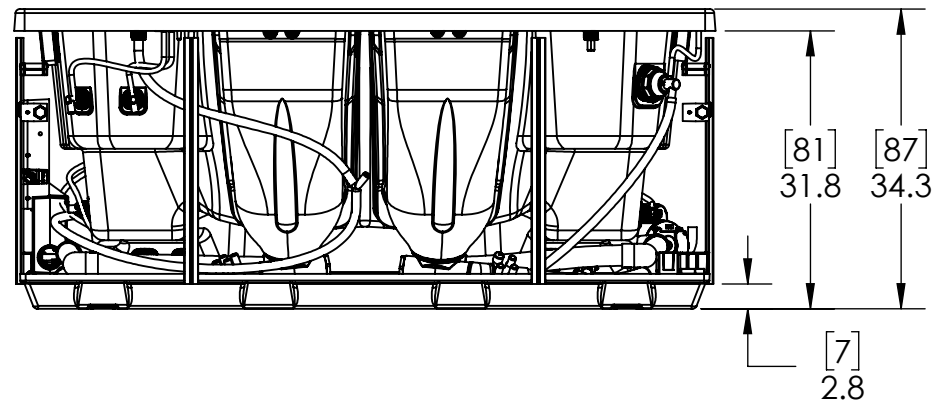
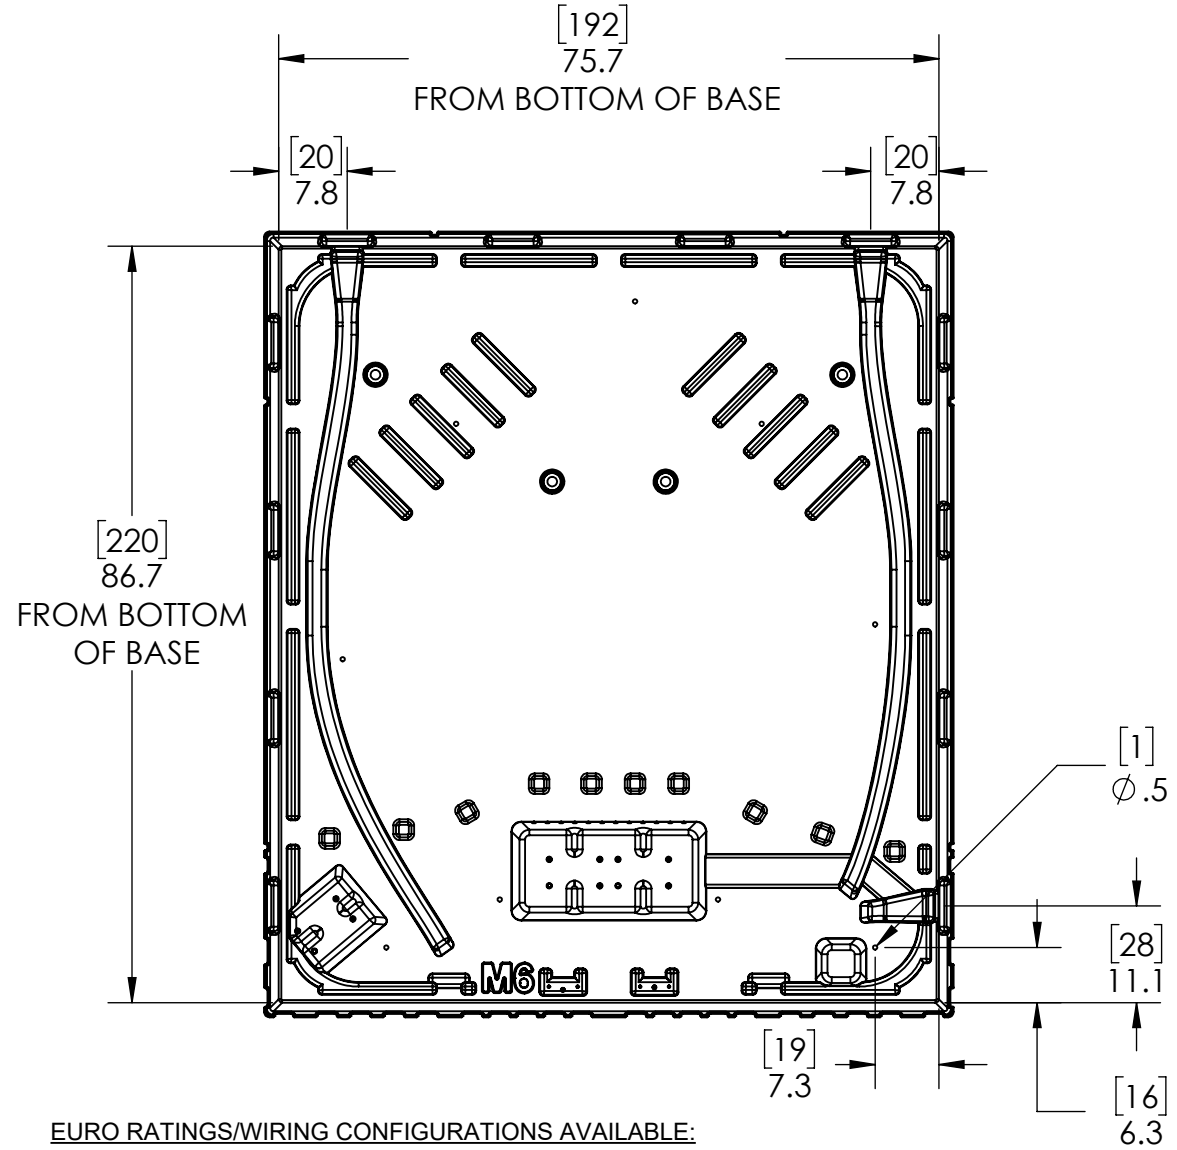


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BULLFROG INTERNATIONAL. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF BULLFROG IS NOT ALLOWED.

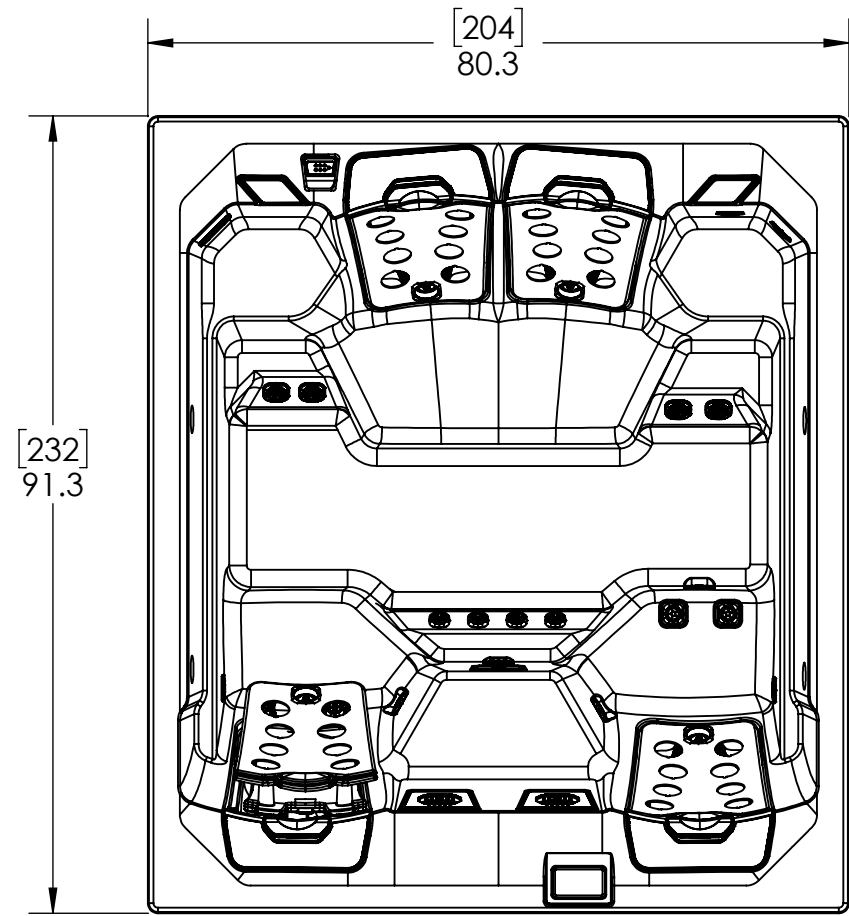

EURO RATINGS/WIRING CONFIGURATIONS AVAILABLE:

- 230 VAC, 50 Hz, 16A x 1
- 230 VAC, 50 Hz, 16A x 2
- 230 VAC, 50 Hz, 32 A**
- 400 VAC, 50 Hz, 16 A x 3 (3 phase)**

US RATINGS/WIRING CONFIGURATIONS AVAILABLE:

- 240 VAC, 60Hz, 30 A
- 240 VAC, 60Hz, 50 A**

NOTE: RATINGS AMPERAGE IN BOLD TYPE ARE PREFERRED FULL FUNCTIONALITY SETUPS. OTHER SET-UPS MAY RESULT IN OPERATION LIMITATIONS. CONTACT YOUR DEALER FOR DETAILS.

CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE DO NOT SCALE DRAWING	MODELED BY	NAME	DATE	
	APPROVED BY	AL		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	<input type="checkbox"/> CONTROLLED PART CES, ETL, UL, OR OTHER REGULATORY AGENCY			TITLE:
TOLERANCES ARE: FRACTIONS ± 1/16 DECIMALS .x ± .1 .XX ± .02 .XXX ± .005 .XXXX ± .0020	MATERIAL:			M6 FINAL ASSY. DRAWING W/ MEASUREMENT IN INCHES
SURFACE TREATMENT:	VENDOR:			SIZE B
MATERIAL CONDITION:	MANUFACTURER:			PART NUMBER:
	VENDOR PART NUMBER:			REV
	SCALE: 1:22			SHEET 1 OF 1