



Variable clearance of 8" - 30" (Depending on cover lifter style).

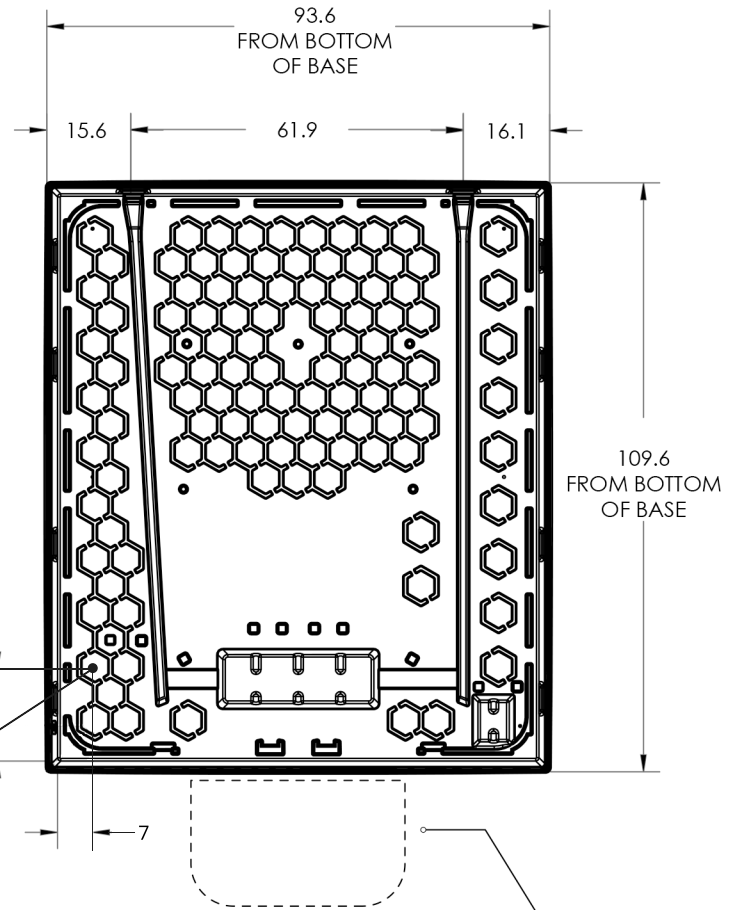

Conduit stub-up

Entry stair location (Dimensions vary with style).

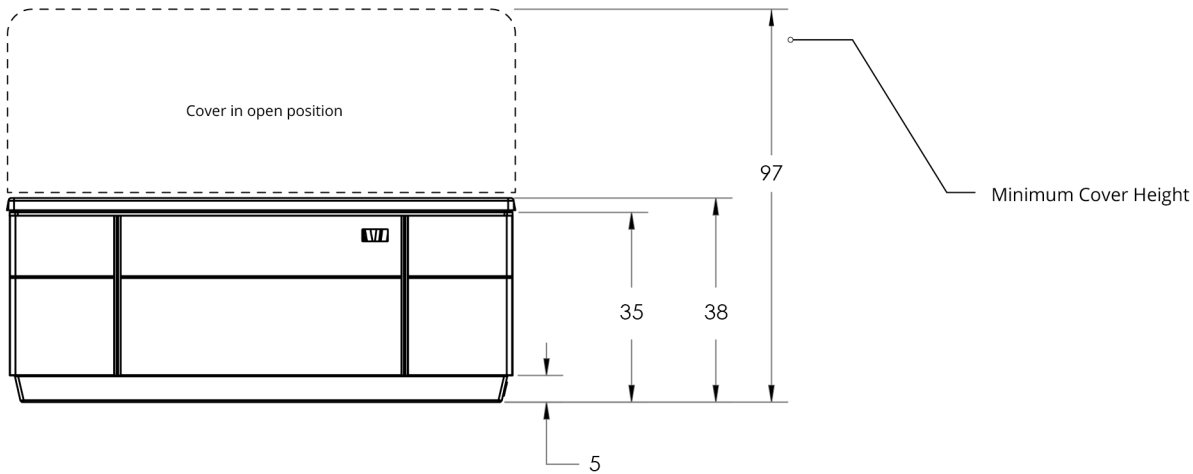

Minimum Cover Height

**M9**

**bullfrog**  
spas

SERVICE AMPERAGE BREAKER	220V 60A GFCI
WIRE TYPE	6/3WG
CONDUIT TYPE	NON-METALLIC
WIRE DIAMETER	3/4"

DRY WEIGHT	1,209 LBS
FILLED WEIGHT	7,664 LBS